

SERIES 6503 6504 .098"(2.5m/m) Pitch Wire-to-wire Connectors



JH




STANDARDS

ALUS

E141311(豪訊)

All bear JH mark

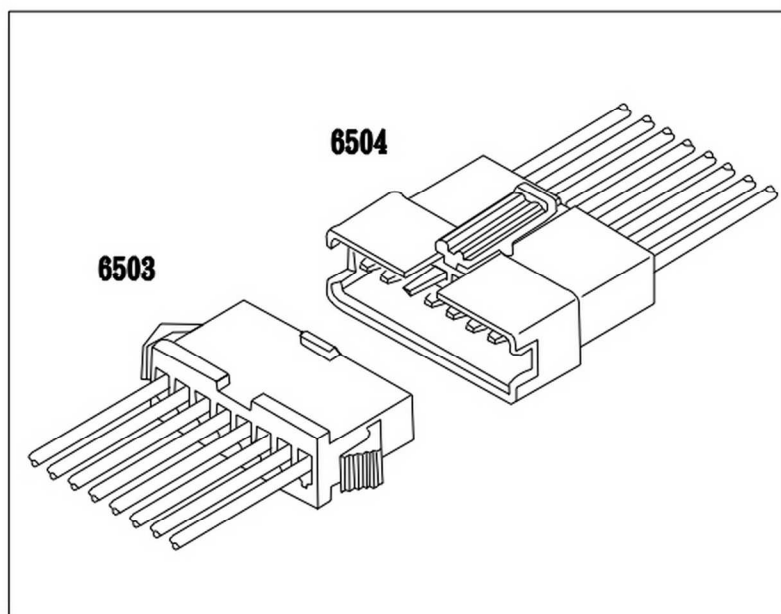


SPECIFICATIONS

- ⊛ Circuit: 2~12, 16, 18
- ⊛ Voltage rating: 250V AC, DC
- ⊛ Current rating: 3A AC, DC
- ⊛ Withstanding voltage: 1000V AC/minute
- ⊛ Insulation resistance: 500M Ω min
- ⊛ Temperature range: -25°C ~ +85°C
- ⊛ Unit(單位): m/m
- ⊛ Material(材質): UL94V-0 nylon 66
- ⊛ Tolerance(公差): ± 0.3 m/m
- ⊛ Color(顏色): BLACK(黑色)
WHITE(白色)


WIRE RANGE	O.D.OF WIRE INSULATION	MATERIAL	PLATING	QUANTITY PER REEL
AWG				
28-22	1.2-1.8	PHOSPHOR BRONZE	TIN-Plated GOLD-FLASH	7000

WIRE RANGE	O.D.OF WIRE INSULATION	MATERIAL	PLATING	QUANTITY PER REEL
AWG				
28-22	1.2-1.8	PHOSPHOR BRONZE	TIN-Plated GOLD-FLASH	7000


TERMINAL 6603

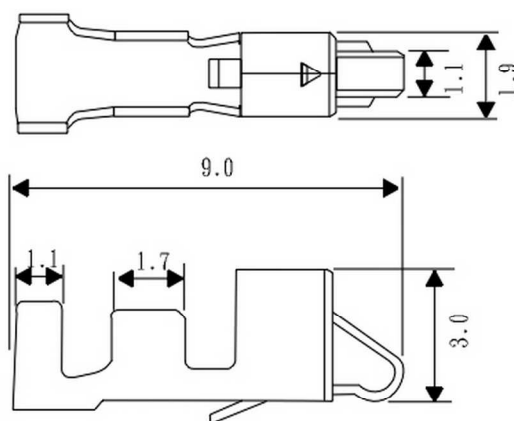

TERMINAL 6604

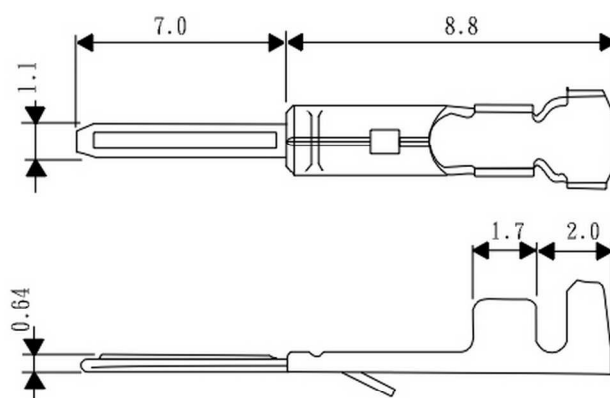


H

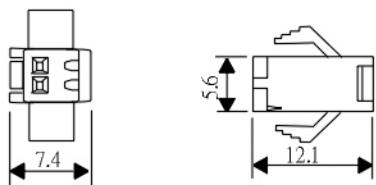 HOUSING 6503-02


H

 HOUSING 6504-02

Pcs/lbag
個數/袋
1000

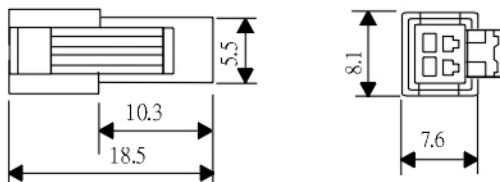


H

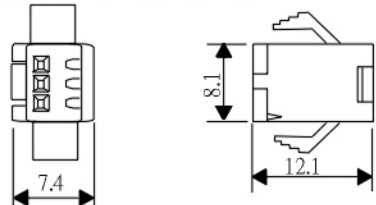 HOUSING 6503-03


H

 HOUSING 6504-03

Pcs/lbag
個數/袋
1000

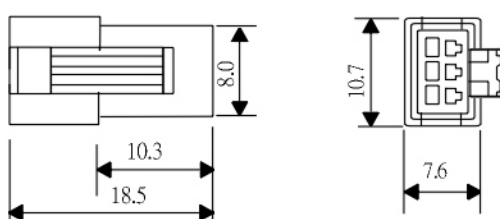


H

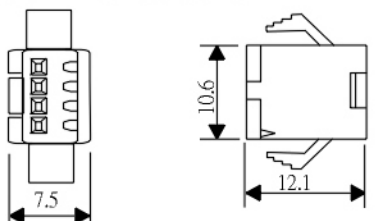 HOUSING 6503-04


H

 HOUSING 6504-04

Pcs/lbag
個數/袋
500

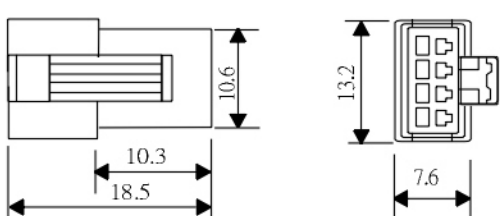


H

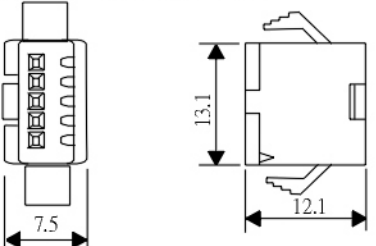 HOUSING 6503-05


H

 HOUSING 6504-05

Pcs/lbag
個數/袋
500

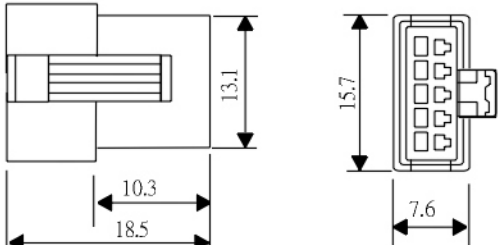


H

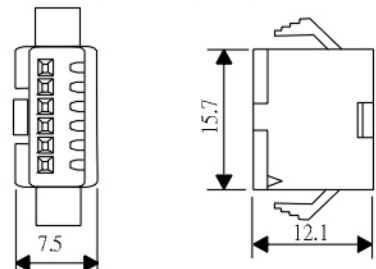 HOUSING 6503-06


H

 HOUSING 6504-06

Pcs/lbag
個數/袋
500

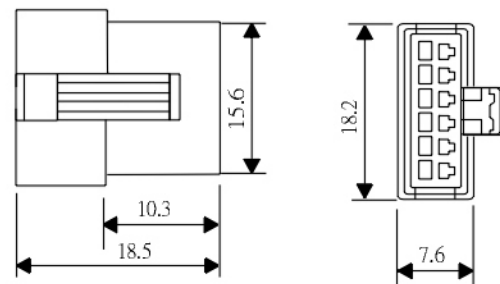


H

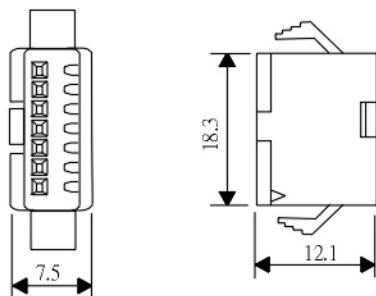 HOUSING 6503-07

H


 HOUSING 6504-07

Pcs/lbag
個數/袋
500

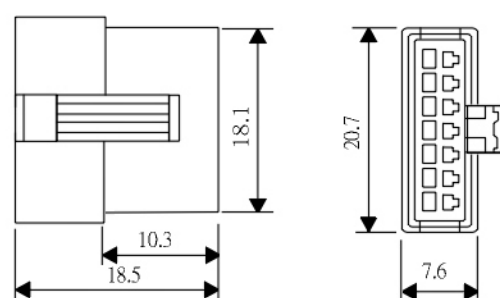

H


OUSING 6503-08

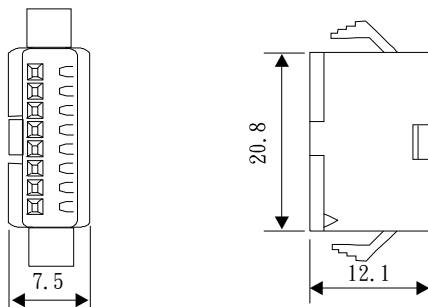

H


OUSING 6504-08

Pcs/1 bag
/
500

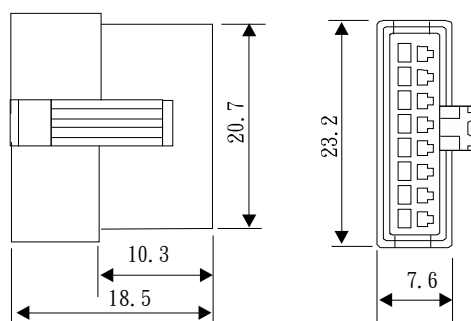

H


OUSING 6503-09

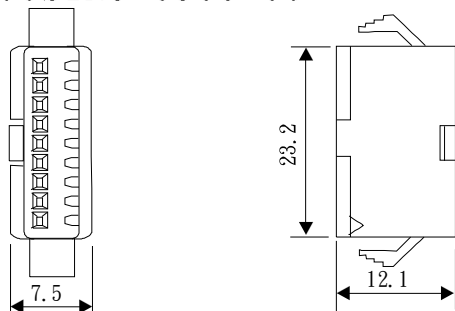

H


OUSING 6504-09

Pcs/1 bag
/
500

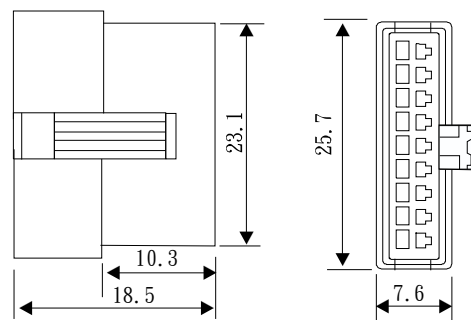

H


OUSING 6503-10

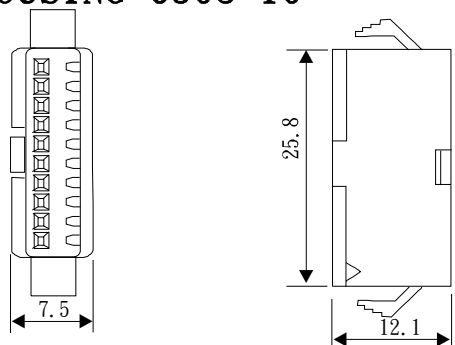

H


OUSING 6504-10

Pcs/1 bag
/
500

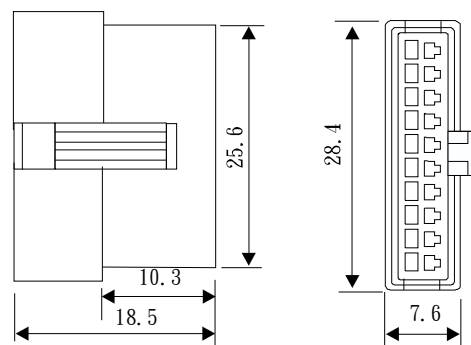

H


OUSING 6503-11

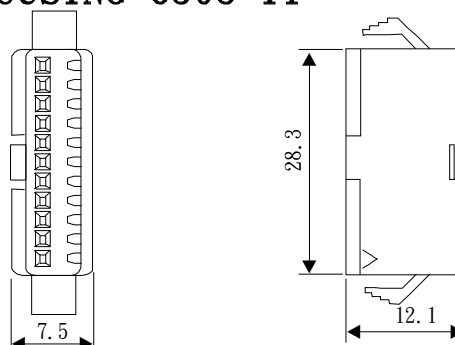

H


OUSING 6504-11

Pcs/1 bag
/
500

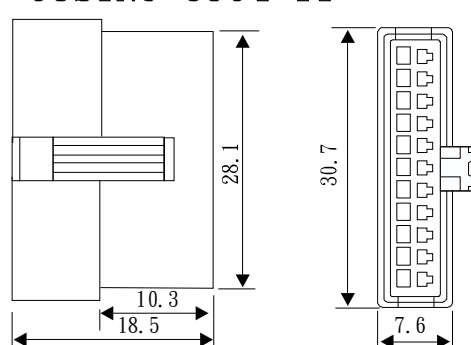

H


OUSING 6503-12

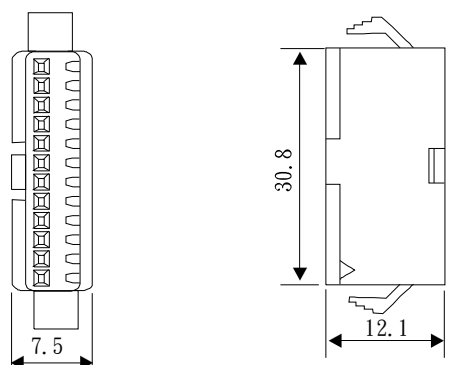

H



OUSING 6504-12

Pcs/1 bag
/
500

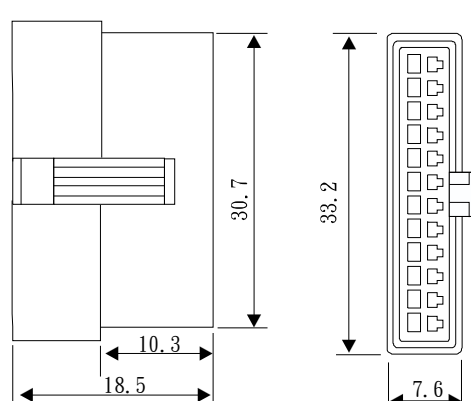



H OUSING 6503-10P (2*5)

新產品
New Product





H OUSING 6504-10P (2*5)

新產品
New Product





H OUSING 6503-12P (2*6)

新產品
New Product





H OUSING 6504-12P (2*6)

新產品
New Product



H OUSING 6503-14P (2*7)



新產品
New Product



H OUSING 6504-14P (2*7)


新產品
New Product

Pcs/bag
個數/袋
500




Number Position

Circuit	Dim/mm	
	A	B
10	13.2	17.1
12	15.7	19.6
14	18.2	22.1




6503



1	8
2	9
3	10
4	11
5	12
6	13
7	14

6504





8	1
9	2
10	3
11	4
12	5
13	6
14	7



D06-1

H



OUSING 6503-16

新產品
New Product**H**



OUSING 6504-16

新產品
New ProductPcs/1 bag
個數/袋
500**H**

OUSING 6503-18




**H**

OUSING 6504-18

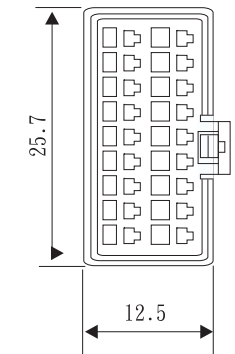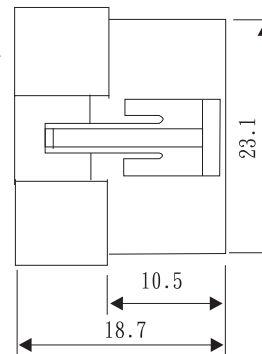Pcs/1 bag
個數/袋
500

Circuit	Dim/mm		circuit	Dim/mm	
	A	B		A	B
2	5.7	9.6	9	23.2	27.1
3	8.2	12.1	10	25.7	29.6
4	10.7	14.6	11	28.2	32.1
5	13.2	17.1	12	30.7	34.6
6	15.7	19.6	16	20.7	24.6
7	18.2	22.1	18	23.2	27.2
8	20.7	24.6			

(組立寸法)

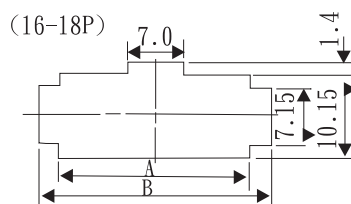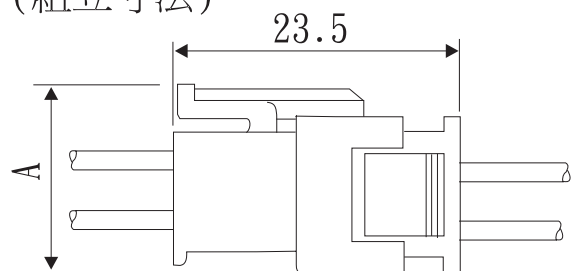


極 數	A寸法(mm)
2-12	8.7
16,18	14.5

Number Position




1
2
3
4
5
6
7
8
9
10
11
12

6503




1 10
2 11
3 12
4 13
5 14
6 15
7 16
8 17
9 18




1
2
3
4
5
6
7
8
9
10
11
12

6504



10 1
11 2
12 3
13 4
14 5
15 6
16 7
17 8
18 9

豪訊-承認書

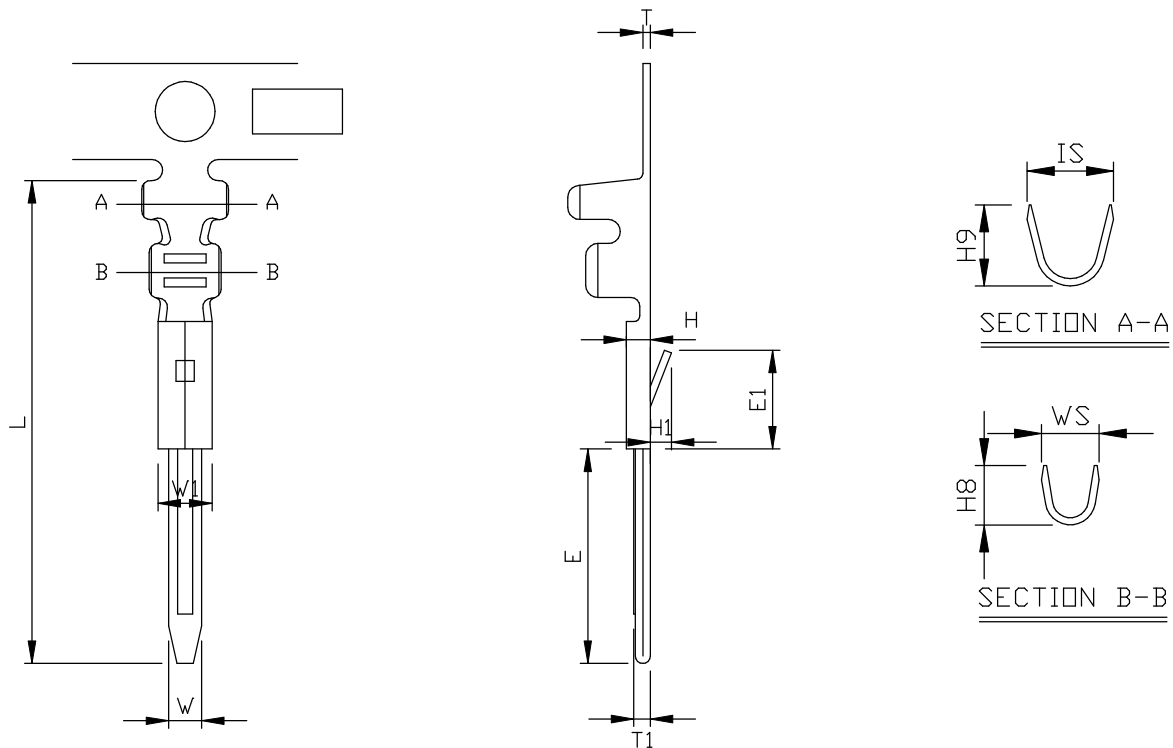

適用電線		線皮外徑	端子材質	塑膠材質	包裝數量		重量	表面處理	連續,單粒
22-28		1.7-1.2	BRASS. SH		7000 PCS		KG	-2	S
尺寸標準					外觀標準			功能標準	
項目	規格		重要度	備註	項目	規格	配合塑膠 公母對插	塑膠編號	
T	0.25± 0.03				M1	JH		插入力	KG MAX
L	16.2± 0.35				M2	二紋		脫拔力	KG MIN
W	1.1 ± 0.2				M3	倒角		端子編號	
E	6.8 ± 0.25				M4	無毛邊		插入力	
H	0.75± 0.2				M5	龜裂,變形	脫拔力		
IS	2.5 ± 0.4				料規		其他	材重	
WS	2.0 ± 0.4				PITCH			材重	
H8	2.2 ± 0.3				沖壓距				
H9	2.7 ± 0.3				一沖數量			配合PIN	
H1	0.75± 0.2				備註:				
T1	0.55± 0.05								
E1	3.10± 0.2								
W1	1.80± 0.2								
修改紀錄									
版次	年月日	修改內容	修改者	核對	製表	校對	日期		
							98.1.7	品名: JH-T6604	