

SERIES **66A5** **66A6** .04"(ϕ 1.0m/m) Wire-to-wire Connectors



JH



STANDARDS




E141311 (豪訊)

All bear JH mark

SPECIFICATIONS

- ★ Circuit:1,2,3,4,6,8,9,10,12,15
- ★ Voltage rating:250V AC,DC
- ★ Current rating:5A AC,DC
- ★ Withstanding voltage:1500V AC/minute
- ★ Insulation resistance:1000M Ω min
- ★ Temperature range:-25°C ~ +85°C
- ★ Unit(單位):m/m
- ★ Material(材質):UL94V-2 nylon 66
- ★ Tolerance(公差): $\pm$ 0.3 m/m

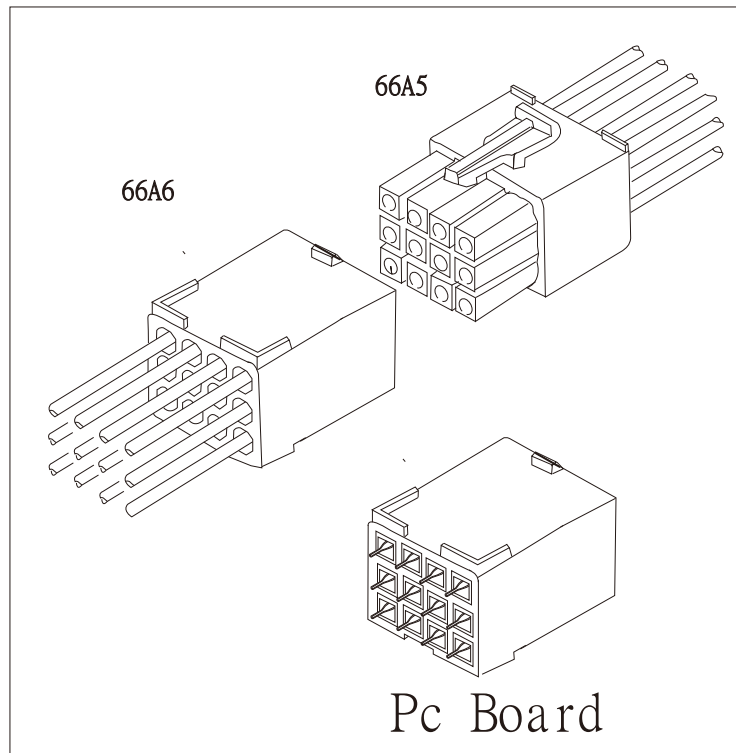

WIRE RANGE	O.D.OF WIRE INSULATION	MATERIAL	PLATING	QUANTITY PER REEL
AWG				
24 - 18	1.5-3.0	PHOSPHOR	TIN-Plated	4000
		BRONZE	GOLD-FLASH	




WIRE RANGE	O.D.OF WIRE INSULATION	MATERIAL	PLATING	QUANTITY PER REEL
AWG				
24 - 18	1.5-3.0	PHOSPHOR	TIN-Plated	4000
		BRONZE	GOLD-FLASH	



TERMINAL 66A5




TERMINAL 66A6

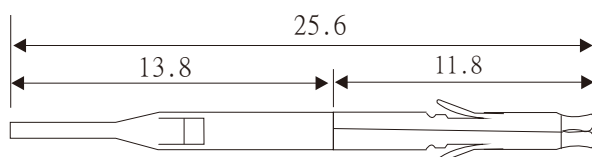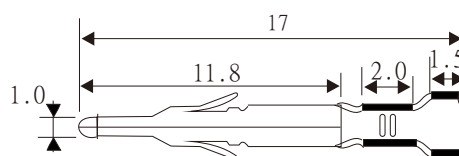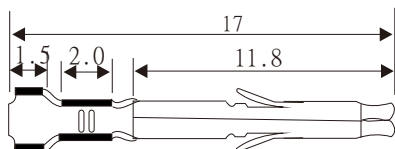


pcs/1bag
2000

Pc Board Socket


H OUSING 66A5-01

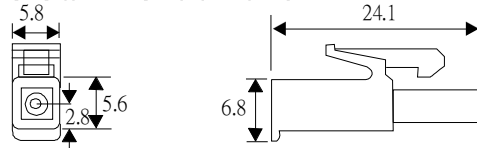


H OUSING 66A6-01

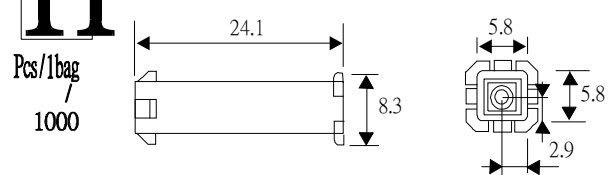


H OUSING 66A5-02

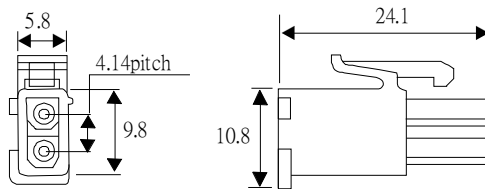


H OUSING 66A6-02 66A6E-02

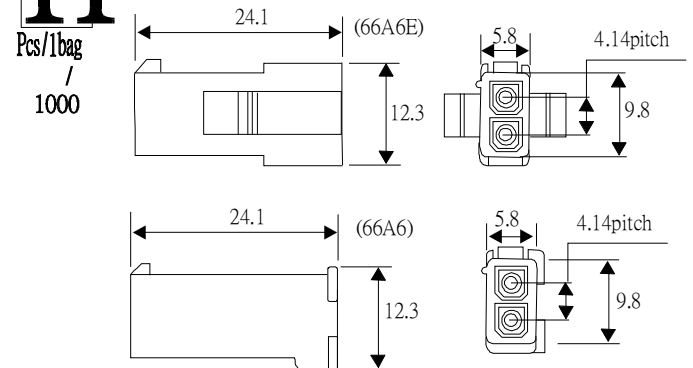


H OUSING 66A5-03

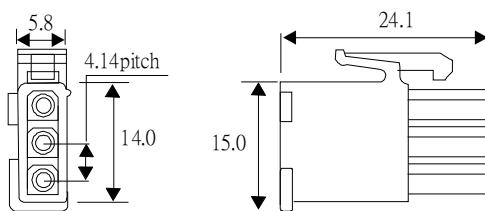


H OUSING 66A6-03 66A6E-03

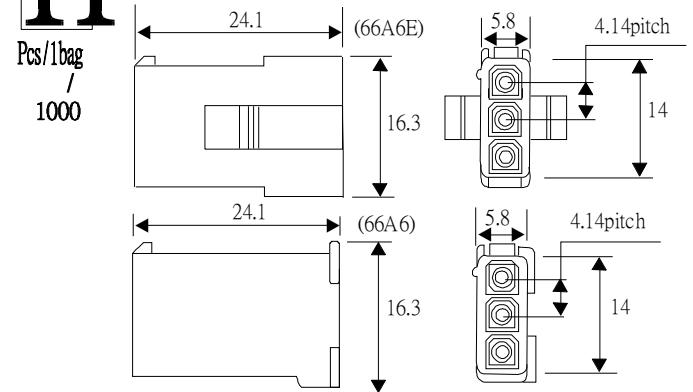


H OUSING 66A5-04

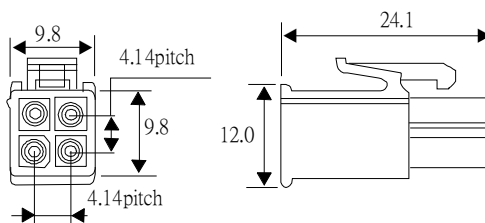


H OUSING 66A6-04 66A6E-04

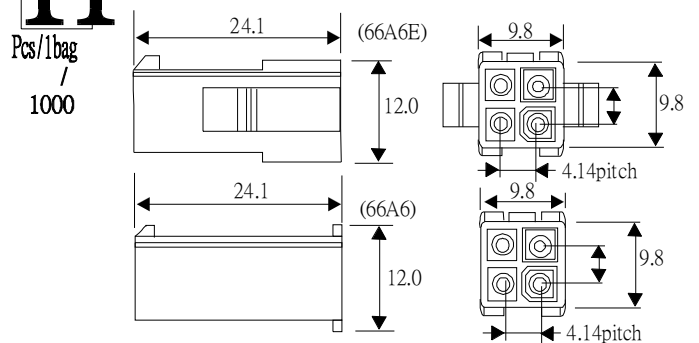


H OUSING 66A5-06

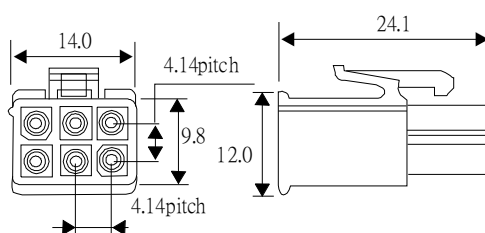


H OUSING 66A6-06 66A6E-06

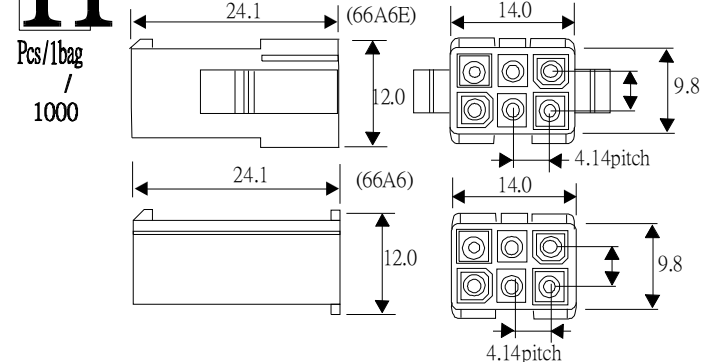


H OUSING 66A5-09

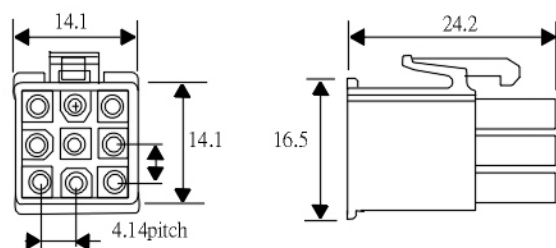


H OUSING 66A6-09,66A6E-09

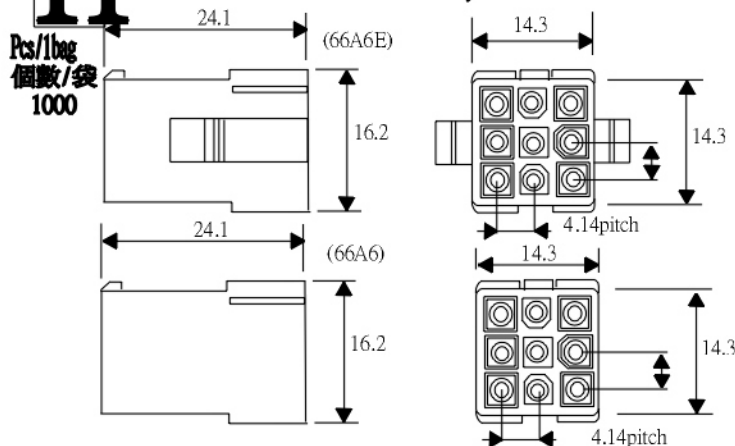


H OUSING 66A5-12

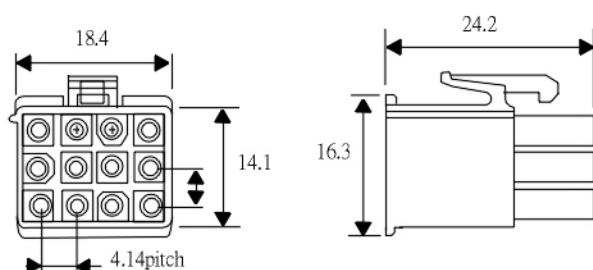


H OUSING 66A6-12,66A6E-12

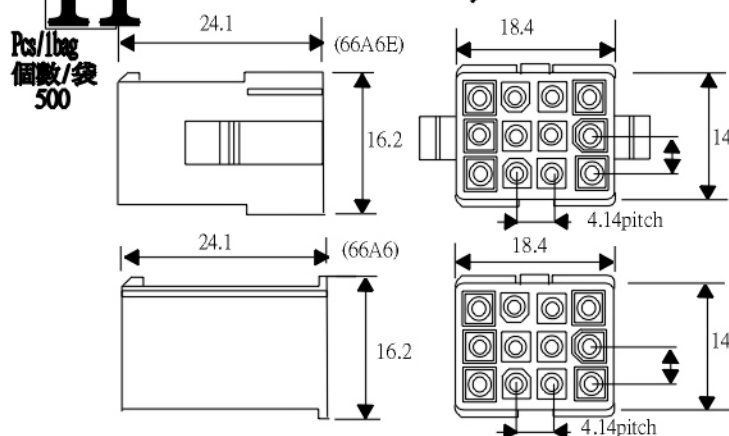

H OUSING 66A5-15

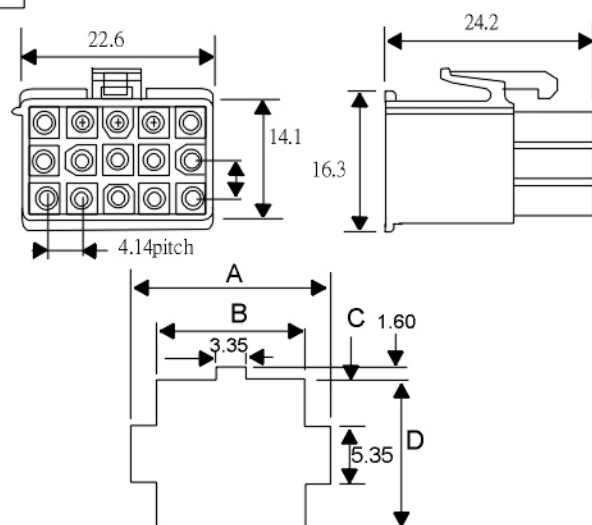

H OUSING 66A6-15,66A6E-15

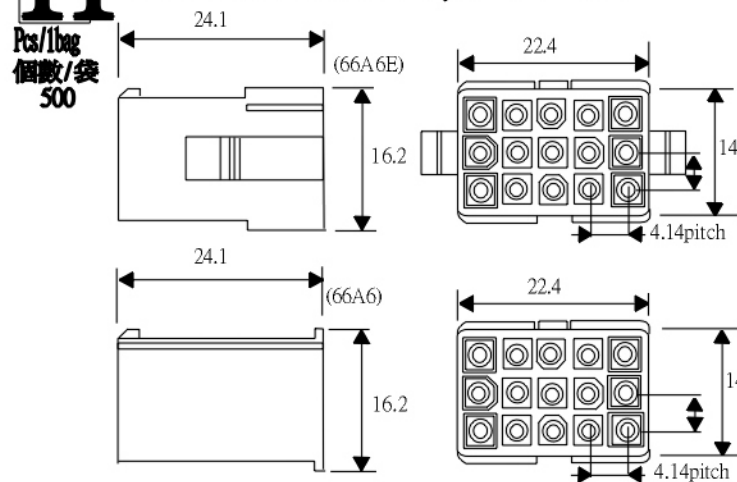

Number of Circuits	Dimensions			
	A	B	C	D
2	10.70	6.15	2.50	10.35
3	10.70	6.15	4.60	14.55
4	14.90	10.35	2.50	10.35
6	19.10	14.55	2.50	10.35
9	19.10	14.55	4.60	14.55
12	23.30	18.75	4.60	14.55
15	27.50	22.95	4.60	14.55

Terminal remover 退端器

