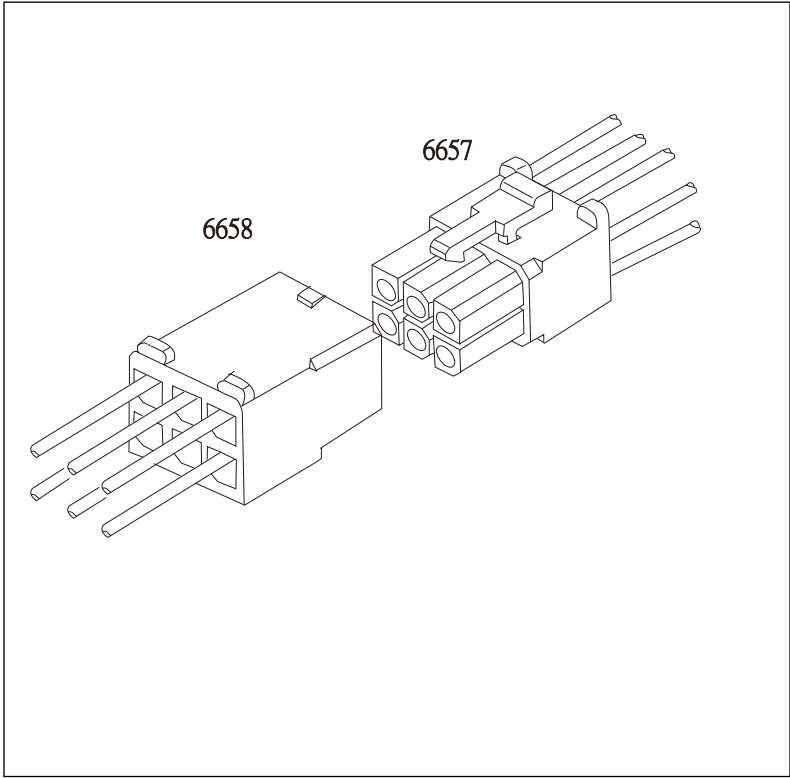


SERIES 6657, 6658 .062" (Ø1.58mm) Wire-to-wire Connectors



SPECIFICATIONS

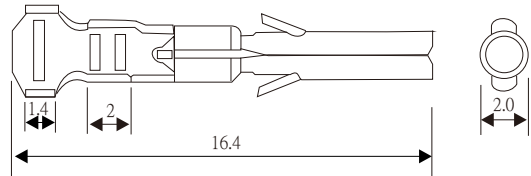
- ⬤ Circuit: 2, 3, 4, 6, 9, 12, 15 (6657, 6658)
- ⬤ Voltage rating: 250V AC, DC
- ⬤ Current rating: 5A AC, DC
- ⬤ Withstanding voltage: 1500V AC/minute
- ⬤ Insulation resistance: 1000MΩ min
- ⬤ Temperature range: -25°C ~ +85°C
- ⬤ Unit (單位): m/m
- ⬤ Material (材質): UL94V-2 nylon 66
- ⬤ Tolerance (公差): ±0.3 m/m
- ⬤ 6655, 6656, 6657, 6658 退端器共用
Terminal remover shared



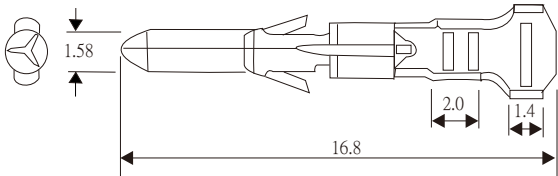
WIRE RANGE	O.D.OF WIRE	MATERIAL	PLATING	QUANTITY
AWG	INSULATION			PER REEL
24-18	1.5-3.0	PHOSPHOR	RIN-Plated	7000
		BRONZE	GOLD-FLASH	

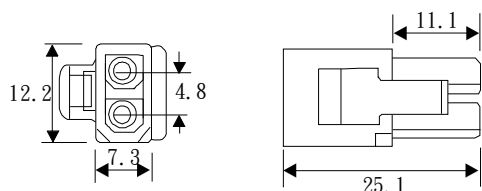
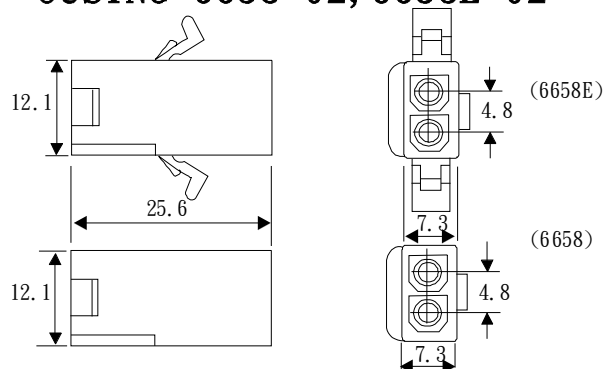
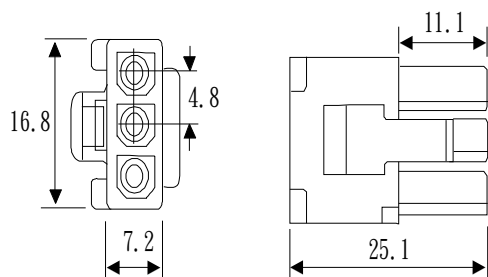
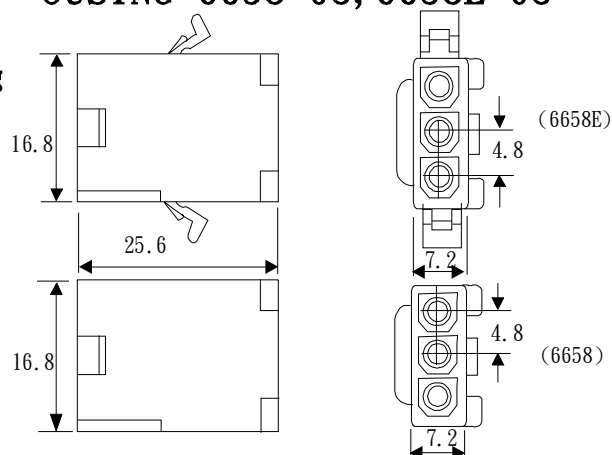
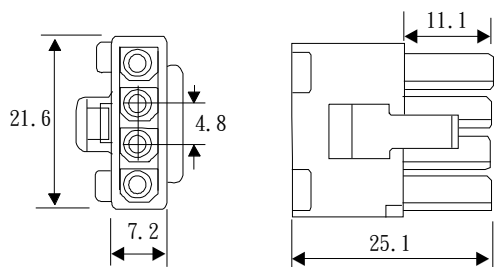
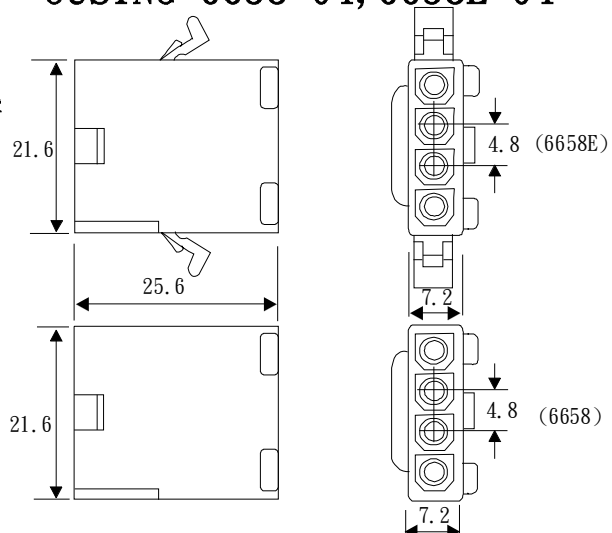
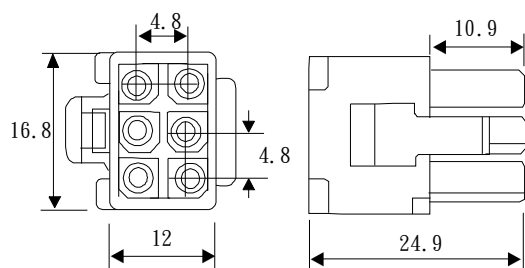
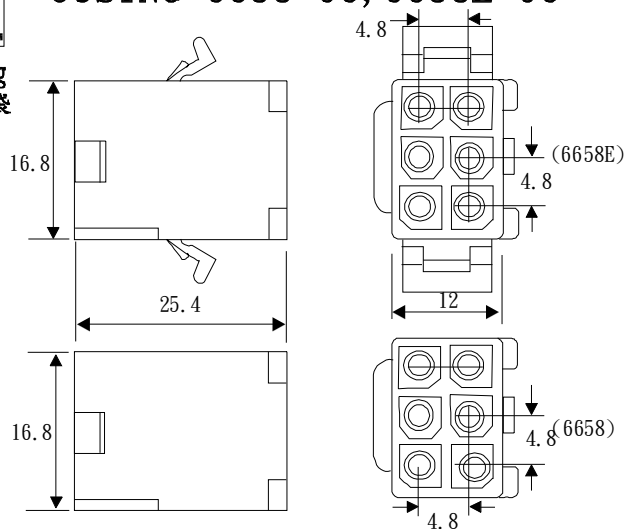
WIRE RANGE	O.D.OF WIRE	MATERIAL	PLATING	QUANTITY
AWG	INSULATION			PER REEL
24-18	1.5-3.0	PHOSPHOR	RIN-Plated	7000
		BRONZE	GOLD-FLASH	

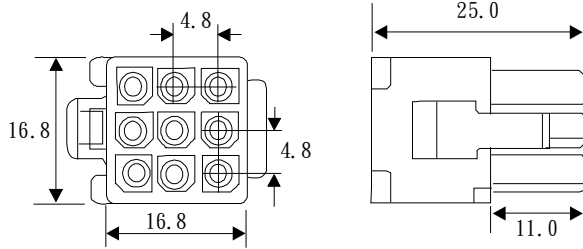
TERMINAL 6655



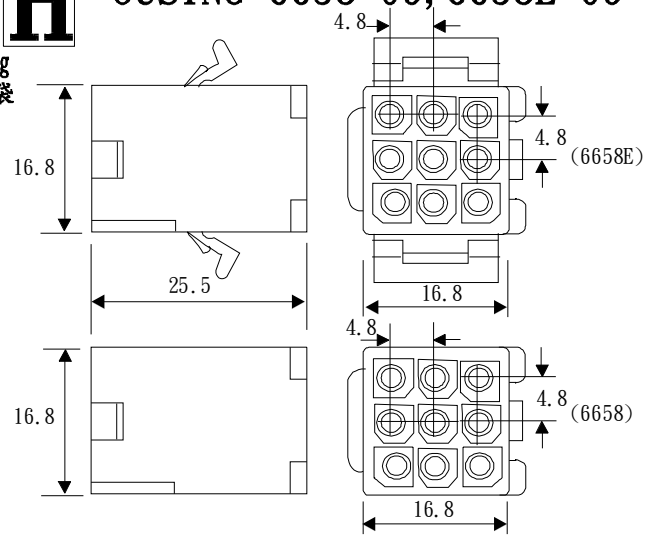
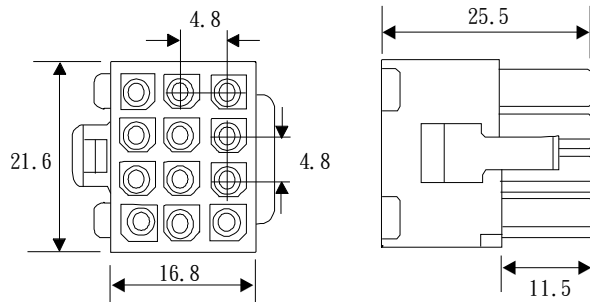
TERMINAL 6656



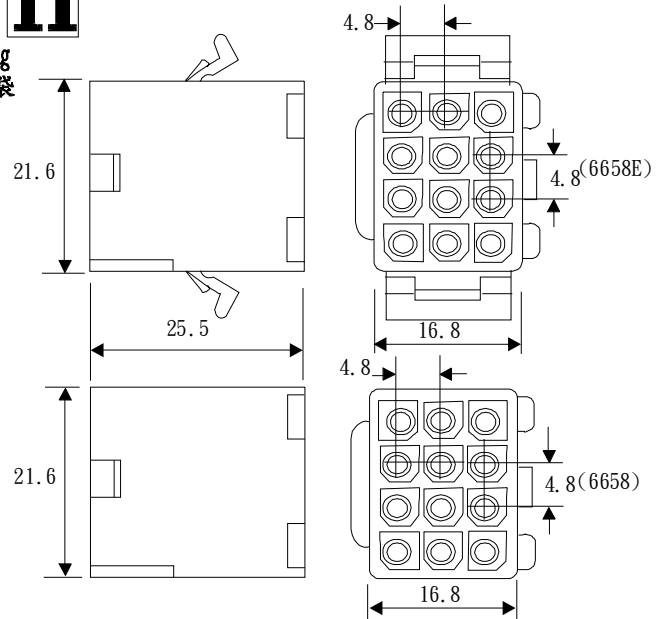
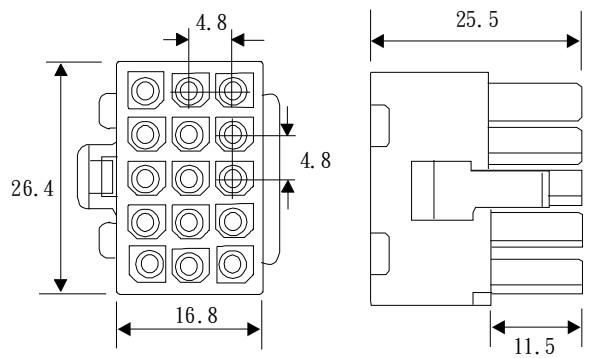
H**OUSING 6657-02****H****OUSING 6658-02, 6658E-02**Pcs/1 bag
個數/袋
500**H****OUSING 6657-03****H****OUSING 6658-03, 6658E-03**Pcs/1 bag
個數/袋
500**H****OUSING 6657-04****H****OUSING 6658-04, 6658E-04**Pcs/1 bag
個數/袋
500**H****OUSING 6657-06****H****OUSING 6658-06, 6658E-06**Pcs/1 bag
個數/袋
500

H**OUSING 6657-09****H****OUSING 6658-09, 6658E-09**

Pcs/1 bag
個數/袋
500

**H****OUSING 6657-12****H****OUSING 6658-12, 6658E-12**

Pcs/1 bag
個數/袋
500

**H****OUSING 6657-15****H****OUSING 6658-15, 6658E-15**

Pcs/1 bag
個數/袋
500

