


SERIES **66J5** **66J6E** .051"(Ø1.3m/m) Wire-to-wire Connectors



SPECIFICATIONS



- ★ Circuit:2,3,4,6,9,12,15
- ★ Voltage rating:300V AC,DC
- ★ Current rating:7A AC,DC
- ★ Withstanding voltage:1500V AC/minute
- ★ Insulation resistance:1000MΩ min
- ★ Temperature range:-25°C~+85°C
- ★ Unit(單位):m/m
- ★ Material(材質):UL94V-0 nylon 66
- ★ Tolerance(公差):±0.3 m/m

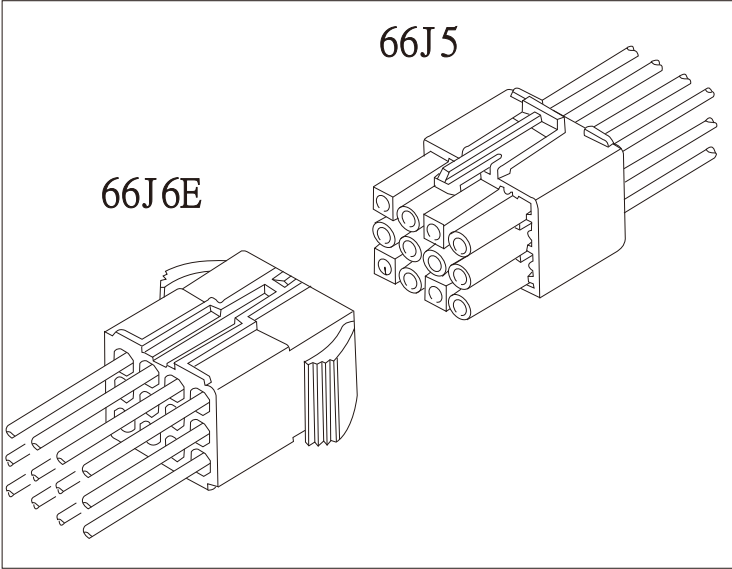


Part NO	WIRE RANGE	O.D.OF WIRE INSULATION	MATERIAL	PLATING	QUANTITY PER REEL
	AWG				
T66J5-A	20 - 16	1.9-3.4	PHOSPHOR GOLD-FLASH	TIN-Plated BRONZE	5000
T66J5	26 - 20	1.3-2.7	PHOSPHOR GOLD-FLASH	TIN-Plated TIN-Plated	7000

Part NO	WIRE RANGE	O.D.OF WIRE INSULATION	MATERIAL	PLATING	QUANTITY PER REEL
	AWG				
T66J6-A	20 - 16	1.9-3.4	PHOSPHOR GOLD-FLASH	TIN-Plated BRONZE	5000
T66J6	26 - 20	1.3-2.7	PHOSPHOR GOLD-FLASH	TIN-Plated TIN-Plated	7000


T ERMINAL 66J5 (A-高腳 High Heel 低腳 Low Heel) **T** ERMINAL 66J6 (A-高腳 High Heel 低腳 Low Heel)

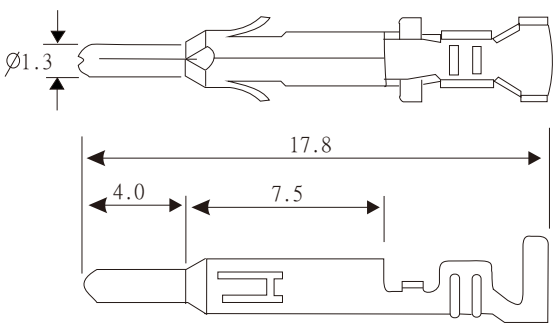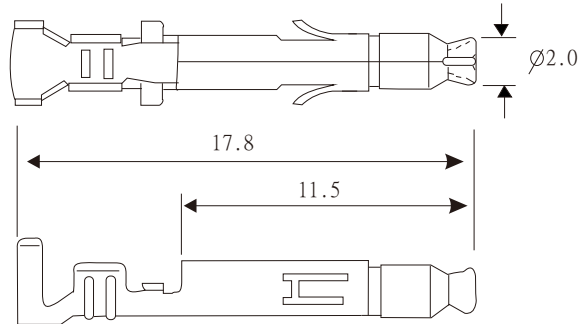


HOUSING 66J5-02

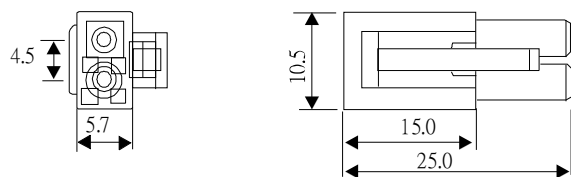


HOUSING 66J6-02,66J6E-02

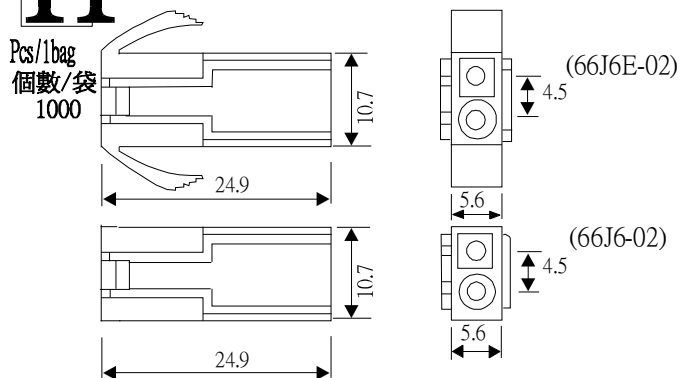


HOUSING 66J5-03

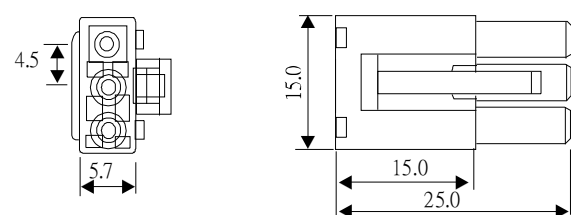


HOUSING 66J6-03,66J6E-03

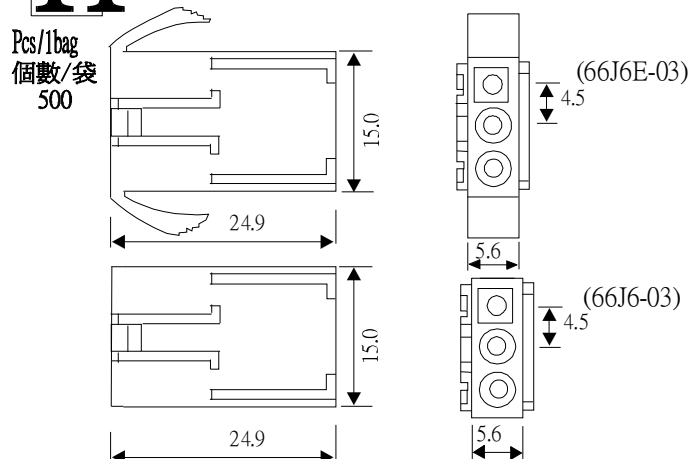


HOUSING 66J5-04 (1*4)

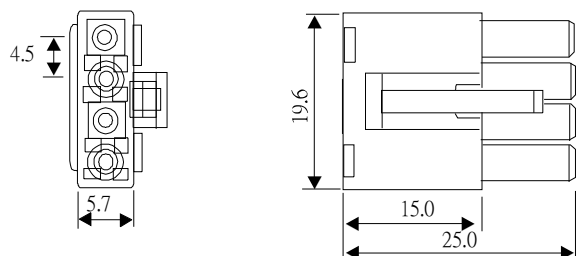


HOUSING 66J6-04,66J6E-04 (1*4)

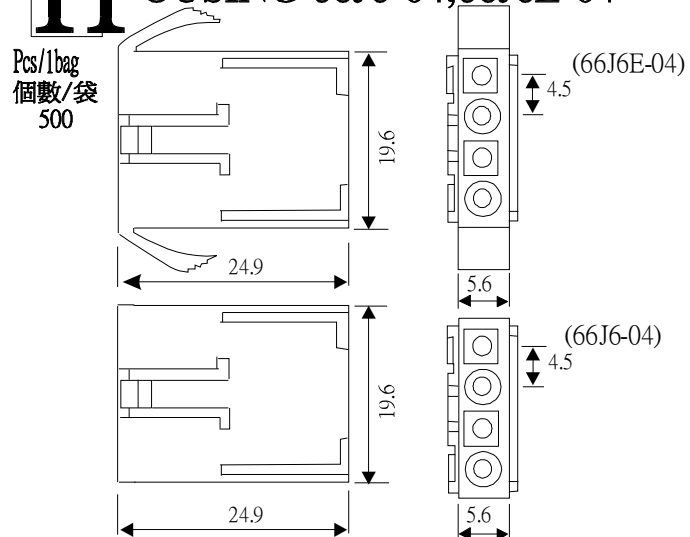


HOUSING 66J5-04 (2*2)

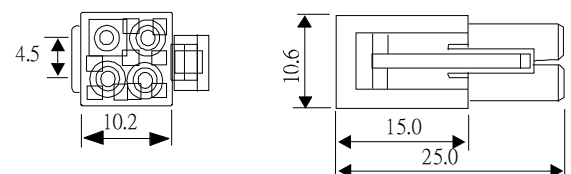

HOUSING 66J6-04,66J6E-04 (2*2)

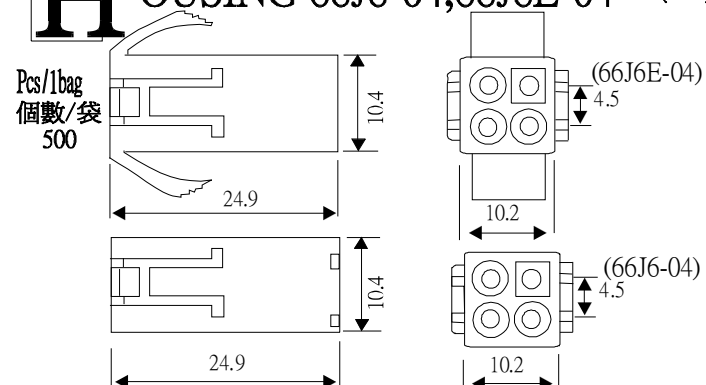


H OUSING 66J5-06

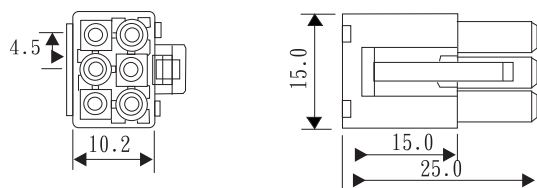


H OUSING 66J6-06,66J6E-06

Pcs/1 bag
500

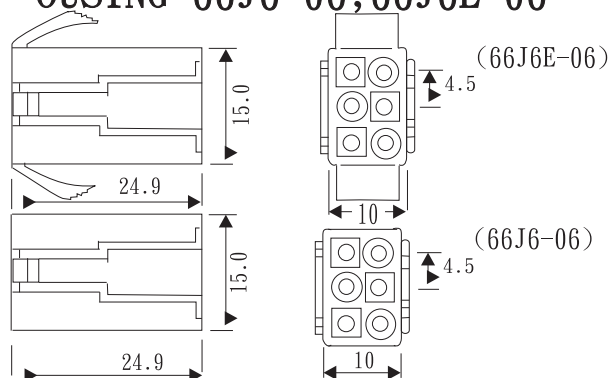


H OUSING 66J5-09

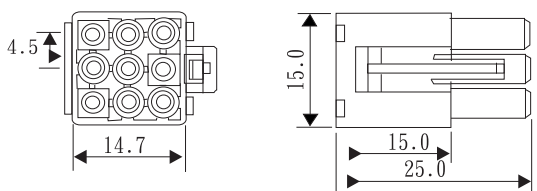


H OUSING 66J6-09,66J6E-09

Pcs/1 bag
500

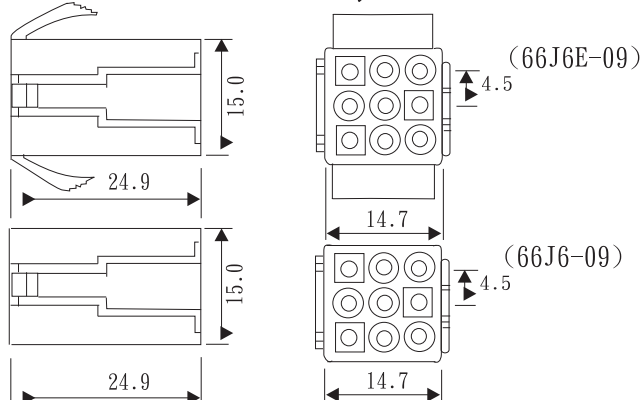


H OUSING 66J5-12

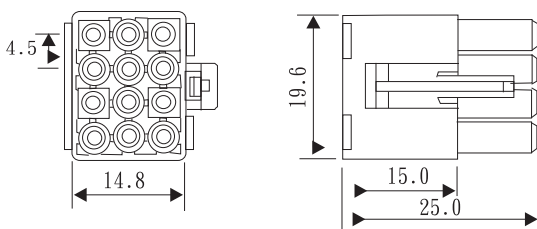


H OUSING 66J6-12,66J6E-12

Pcs/1 bag
500

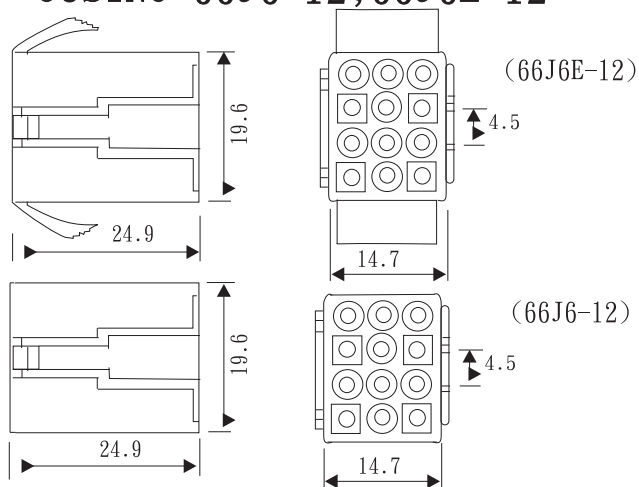


H OUSING 66J5-15

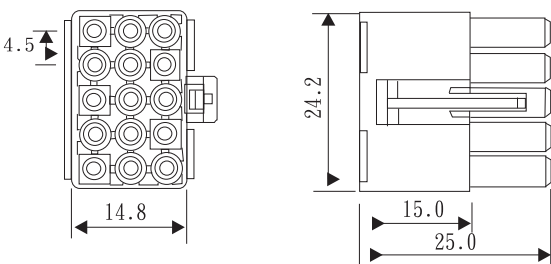


H OUSING 66J6-15,66J6E-15

Pcs/1 bag
500

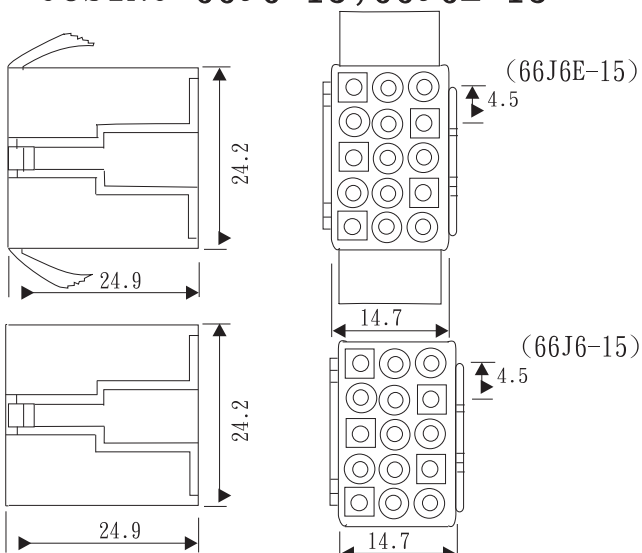

66J5



3	6	9
2	5	8
1	4	7

4	8	12
3	7	11
2	6	10
1	5	9



5	10	15
4	9	14
3	8	13
2	7	12
1	6	11

$$\begin{array}{r|l} 6 & 3 \\ \hline 5 & 2 \\ \hline 4 & 1 \end{array}$$

9	6	3
8	5	2
7	4	1

12	8	4
11	7	3
10	6	2
9	5	1


15	10	5
14	9	4
13	8	3
12	7	2
11	6	1

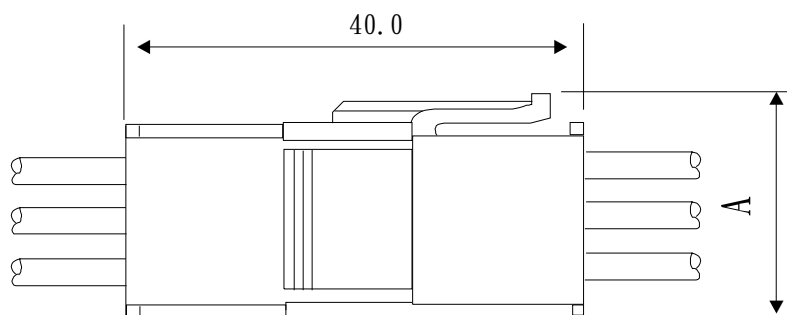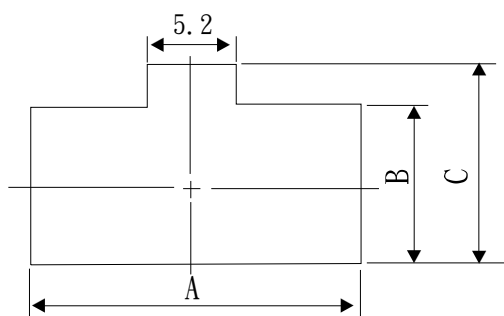


Circuit	Dim/mm		
	A	B	C
2	15.0	6.0	6.85
3	19.7	6.0	6.85
4(1*4)	24.2	6.0	6.85
4(2*2)	15.6	10.6	11.6
6	19.7	10.2	11.1
9	19.7	14.8	15.7
12	24.2	14.8	15.7
15	28.7	14.8	15.7

Circuit 極 數	A (M/M)
2-4 (1*1配置)	10.4
4 (2*2配置)	15.2
6	14.9
9, 12, 15	19.4

Terminal remover 退端器

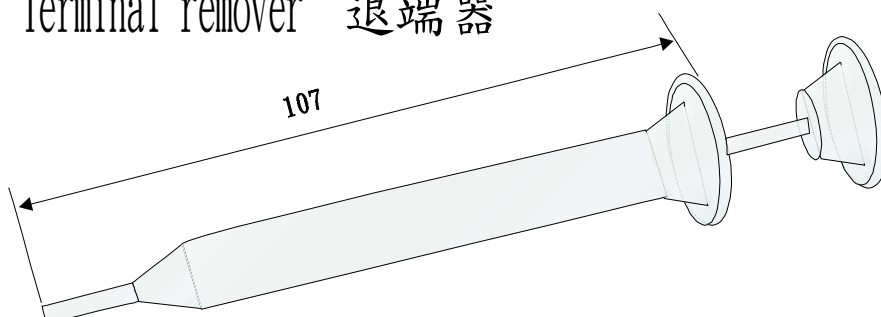


豪訊-承認書

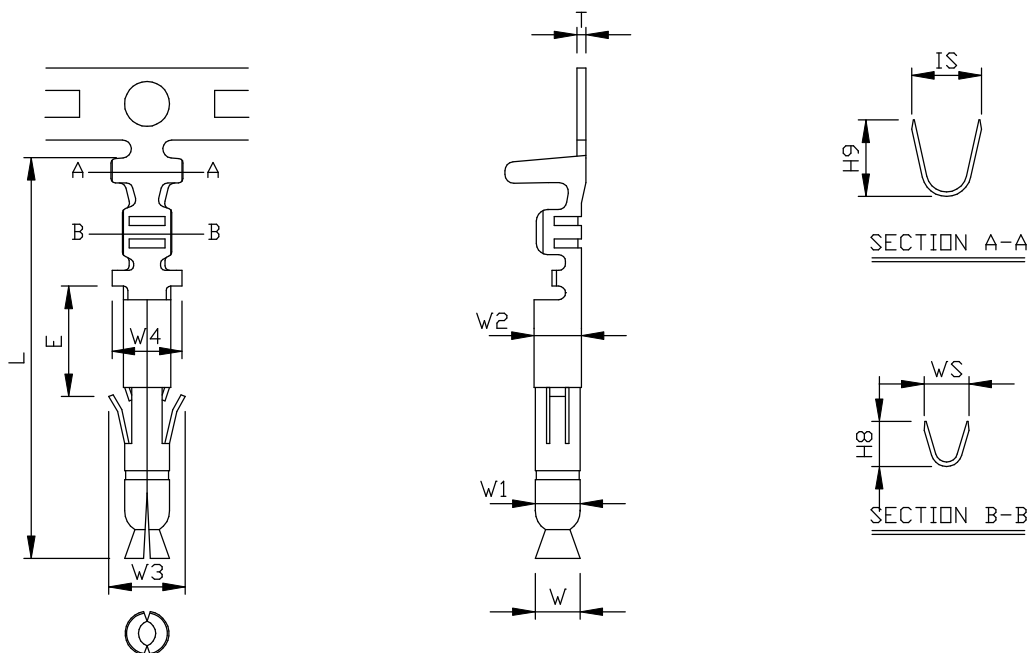


適用電線		線皮外徑	端子材質	塑膠材質	包裝數量		重量		表面處理		連續,單粒	
18-22			BRASS. SH		7000 PCS		KG		-2		BS	
尺寸標準					外觀標準			功能標準				
項目	規格		重要度	備註	項目	規格		配合塑膠 公母對插	塑膠編號			
T	0.2 ± 0.03				M1	JH			插入力	KG MAX		
L	17.90± 0.35				M2	二紋			脫拔力	KG MIN		
IS	3.30± 0.4				M3	倒角		其他	端子編號			
WS	2.0 ± 0.4				M4	無毛邊			插入力	KG		
W	2.0 ± 0.1			配合 PIN	M5	龜裂,變形			脫拔力	KG MIN		
W1	2.0 ± 0.1				料規				材重			
W2	2.10± 0.1				PITCH				配合 PIN	J6T		
W3	3.40± 0.25				沖壓距							
W4	3.20± 0.2				一沖數量							
E	4.90± 0.3				備註：							
H8	2.0 ± 0.3											
H9	3.40± 0.3											
修改紀錄												
版次	年月日	修改內容	修改者	核對	製表	校對	日期					
							99.6.1		品名: JH-T66J5			

豪訊-承認書

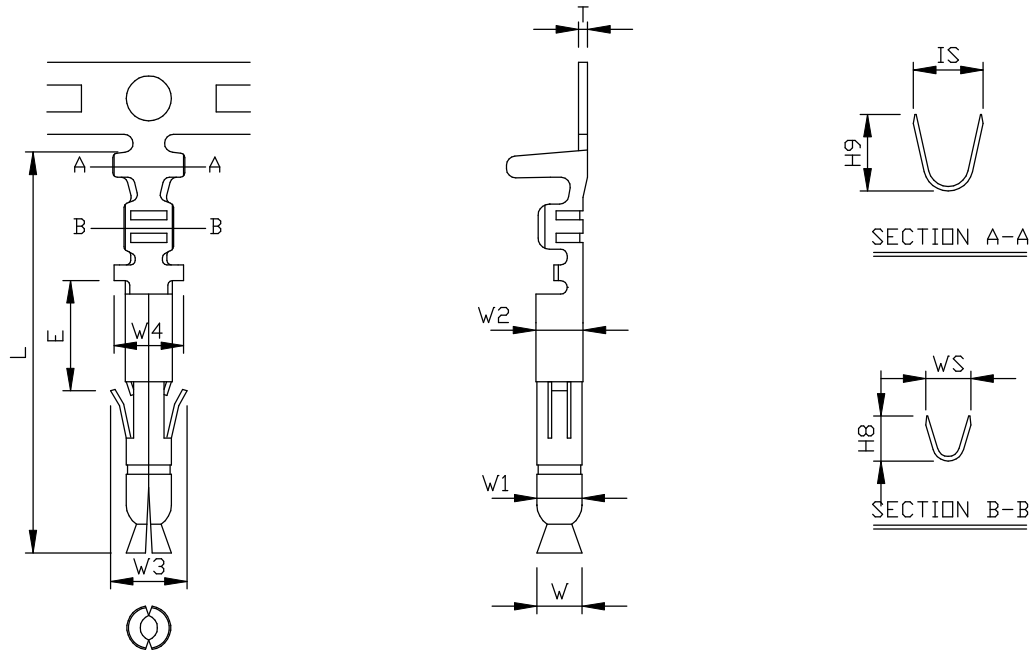


適用電線		線皮外徑	端子材質	塑膠材質	包裝數量		重量		表面處理		連續, 單粒	
16-20		1.3-3.4	BRASS. SH		4000 PCS		KG		-2		BS	
尺寸標準					外觀標準			功能標準				
項目	規格		重要度	備註	項目	規格		配合塑膠 公母對插	塑膠編號			
T	0.2 ± 0.03				M1	JH 	插入力		1.2 KG MAX			
L	17.80± 0.35				M2	二紋	脫拔力		4.5 KG MIN			
IS	5.2 ± 0.4				M3	倒角		其他	端子編號			
WS	3.1 ± 0.4				M4	無毛邊			插入力	0.7-1.0 KG		
W	2.0 ± 0.1			配合 PIN	M5	龜裂, 變形			脫拔力	0.3 KG MIN		
W1	2.0 ± 0.1				料規	0.2X22.3			材重			
W2	2.10± 0.1				PITCH	10.8			配合 PIN	J6T		
W3	3.40± 0.25											
W4	3.20± 0.2											
E	4.90± 0.3				備註:							
H8	3.0 ± 0.3											
H9	4.6 ± 0.3											
修改紀錄												
版次	年月日	修改內容	修改者	核對	製表	校對	日期					
							99.9.9	品名: JH-T66J5-A				

豪訊-承認書

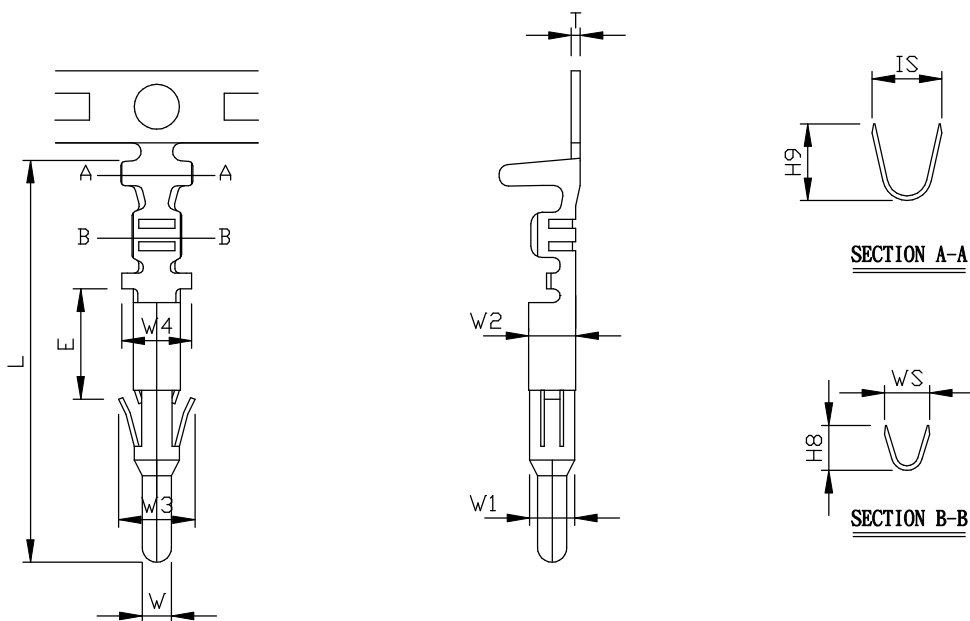

適用電線		線皮外徑	端子材質	塑膠材質	包裝數量		重量	表面處理	連續,單粒
18-22			BRASS. SH		7000 PCS		KG	-2	BS
尺寸標準					外觀標準			功能標準	
項目	規格		重要度	備註	項目	規格	配合塑膠 公母對插	塑膠編號	
T	0.2 ± 0.03				M1	JH		插入力	KG MAX
L	17.90± 0.35				M2	二紋		脫拔力	KG MIN
IS	3.30± 0.4				M3	倒角	公母對插	端子編號	
WS	2.0 ± 0.4				M4	無毛邊		插入力	KG
W	1.30± 0.07				M5	龜裂,變形		脫拔力	KG MIN
W1	2.0 ± 0.1				料規		其他	材重	
W2	2.10± 0.1				PITCH			配合 PIN	
W3	3.30± 0.25				沖壓距				
W4	3.2 ± 0.2				一沖數量				
E	4.90± 0.2				備註:				
H8	2.0 ± 0.3								
H9	3.40± 0.3								
修改紀錄									
版次	年月日	修改內容	修改者	核對	製表	校對	日期		
							99.6.1	品名: JH-T66J6	

豪訊-承認書

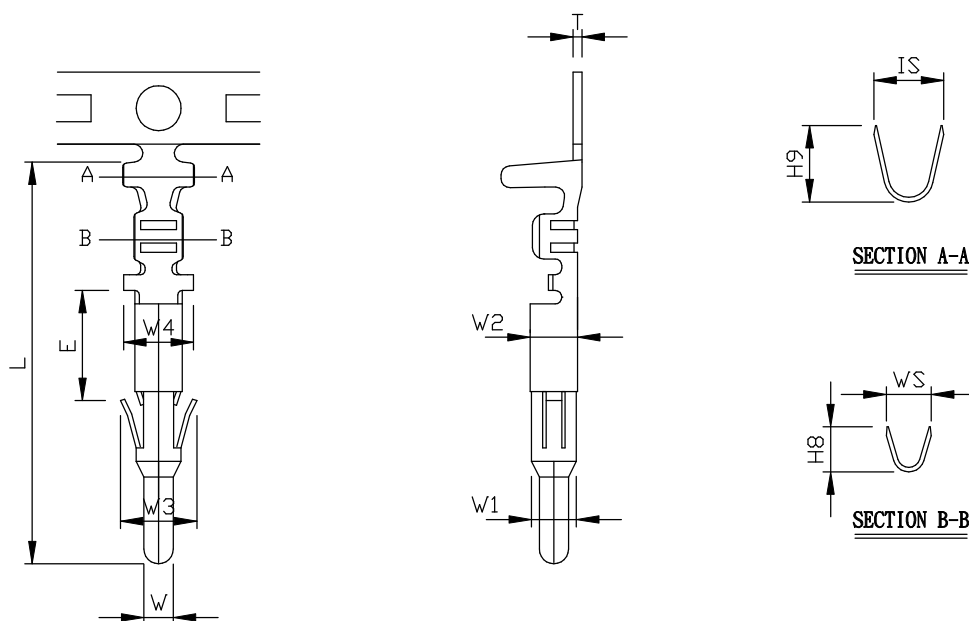

適用電線		線皮外徑	端子材質	塑膠材質	包裝數量		重量	表面處理	連續,單粒
16-20		1.3-3.4	BRASS. SH		4000 PCS		KG	-2	BS
尺寸標準					外觀標準			功能標準	
項目	規格		重要度	備註	項目	規格	配合塑膠 公母對插	塑膠編號	
T	0.2 ± 0.03				M1	JH 		插入力	1.2 KG MAX
L	17.70± 0.35				M2	二紋		脫拔力	4.5 KG MIN
IS	5.2 ± 0.4				M3	倒角	公母對插	端子編號	
WS	3.1 ± 0.4				M4	無毛邊		插入力	KG
W	1.30± 0.07				M5	龜裂,變形		脫拔力	KG MIN
W1	2.0 ± 0.1				料規	0.2X22.3	其他	材重	
W2	2.10± 0.1				PITCH	10.8		配合 PIN	
W3	3.30± 0.25								
W4	3.2 ± 0.2								
E	4.90± 0.2				備註:				
H8	3.0 ± 0.3								
H9	4.6 ± 0.3								
修改紀錄									
版次	年月日	修改內容	修改者	核對	製表	校對	日期		
							101.7.27	品名:JH-T66J6-A	