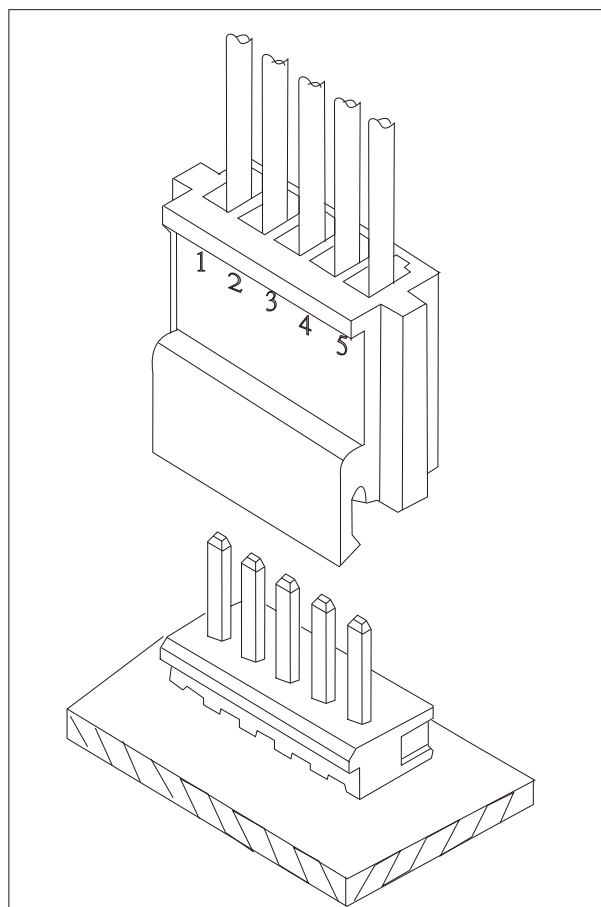


SERIES 6603 .098"(2.5m/m) Pitch disconnectable connectors

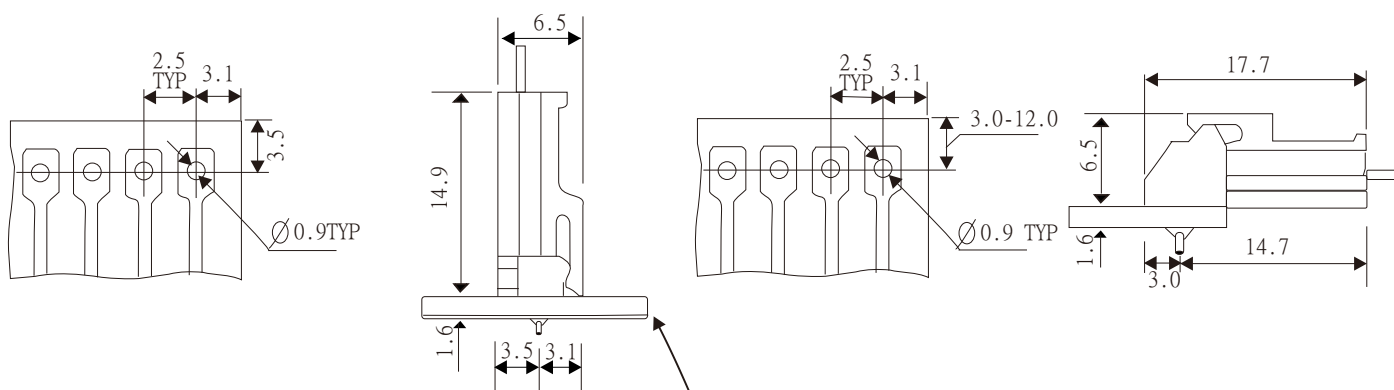
**JH****STANDARDS****E141311 (豪訊)**

All bear JH mark

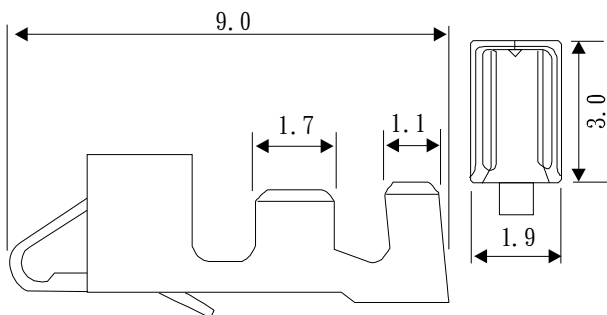


SPECIFICATIONS

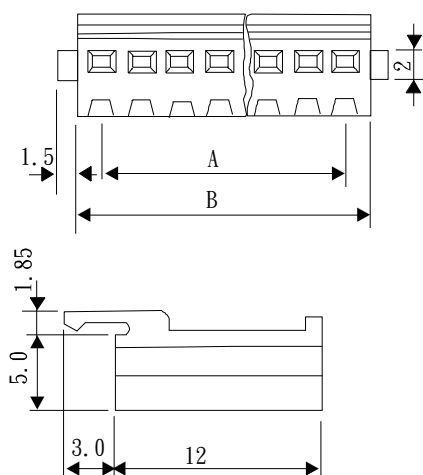
- ★ Circuit:2-20
- ★ Voltage rating:250V AC,DC
- ★ Current rating:3A AC,DC
- ★ Withstanding voltage:1500V AC/minute
- ★ Insulation resistance:500M Ω min
- ★ Temperature range:-25°C ~ +85°C
- ★ Unit(單位):m/m
- ★ Material(材質):UL94V-0 nylon 66
- ★ Tolerance(公差): ± 0.3 m/m



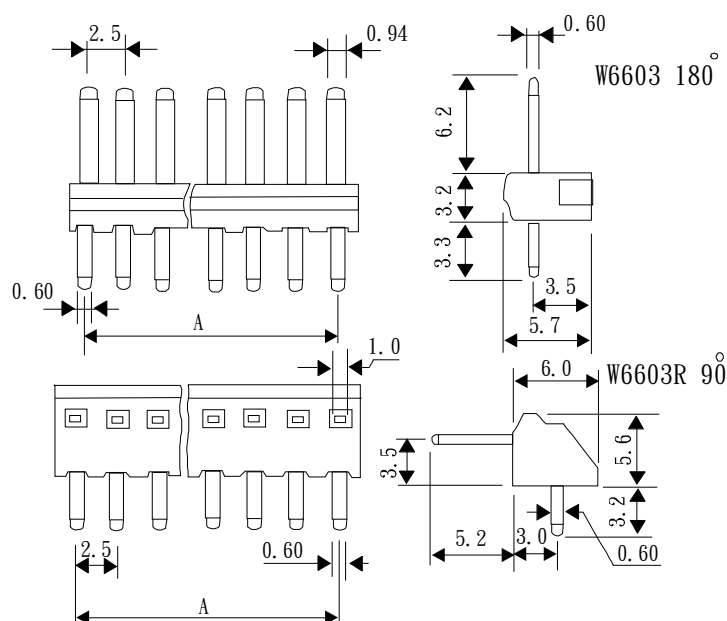
Applicable PC board thickness:(1.6m/m)

T**TERMINAL 6603**

WIRE RANGE		O. D. OF WIRE INSULATION	MATERIAL	PLATING	QUANTITY PER REEL
MM ²	AWG				
0.08~0.33	28 ~ 22	1.2~1.7	BRONZE	TIN-Plated	7.000

H**HOUSING 6603**

Circuit	Dim/mm		PCS/1 bag 個数/袋	Circuit	Dim/mm		PCS/1 bag 個数/袋	Material
	A	B			A	B		
2	2.5	5.8	1000	12	27.5	31.0	500	NYLON 66 UL94V-0
3	5.0	8.3	1000	13	30.0	33.4	500	
4	7.5	10.9	1000	14	32.5	35.9	500	
5	10.0	13.4	500	15	35.0	38.5	500	
6	12.5	15.8	500	16	37.5	41.0	500	
7	15.0	18.4	500	17	40.0	43.4	500	
8	17.5	20.8	500	18	42.5	46.0	500	
9	20.0	23.4	500	19	45.0	48.5	500	
10	22.5	25.8	500	20	47.5	51.0	500	
11	25.0	28.4	500					

W**AFER 6603**

Circuit	Dim/mm		PCS/1 bag 個数/袋	Circuit	Dim/mm		PCS/1 bag 個数/袋	Material
	A				A			
2	2.5		1000	12	27.5		500	NYLON 66 UL94V-0
3	5.0		1000	13	30.0		500	
4	7.5		1000	14	32.5		500	
5	10.0		500	15	35.0		500	
6	12.5		500	16	37.5		500	
7	15.0		500	17	40.0		500	
8	17.5		500	18	42.5		500	
9	20.0		500	19	45.0		500	
10	22.5		500	20	47.5		500	
11	25.0		500					